


2. Unroll and lay matting out down slope face (in direction of flow). Anchor at top of slope. Do not stretch matting.

> I. Grade, smooth, and compact slope. Remove rocks, trash, and other material which will prevent the matting from laying flush with the ground. Do not track slope face.

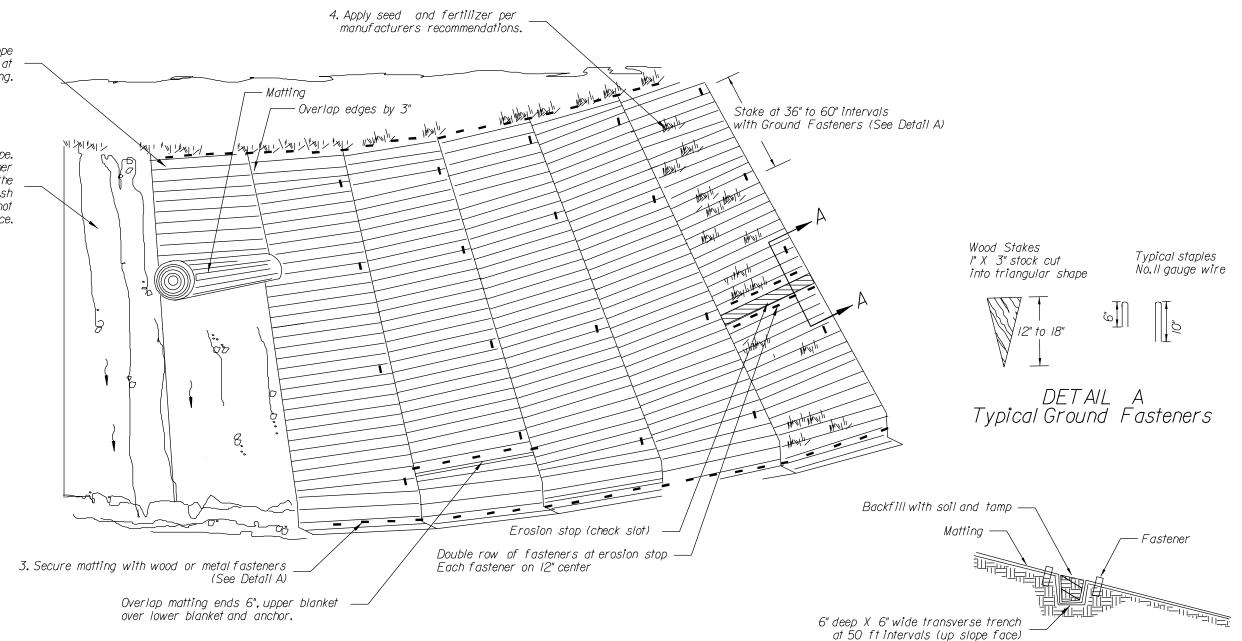

SECTION A-A Erosion Stop (Check Slot) Detail

DETAIL FOR STABILIZING SLOPES WITH MATTING

U.S. DEPARTMENT OF TRANSPORTATION FEDERAL HIGHWAY ADMINISTRATION EASTERN FEDERAL LANDS HIGHWAY DIVISION

DETAIL

SLOPE STABILIZATION WITH MATTING

NO SCALE

DETAIL APPROVED FOR USE --/---DETAIL REVISED: E629-I